




Technical features

Max. flow: 15 l/h

Thread connection: 3/4"

Pipe connection : 1/2"

Hose connection: 4x6
(Øin x Øout mm) 6x8 / 6x12
10x12

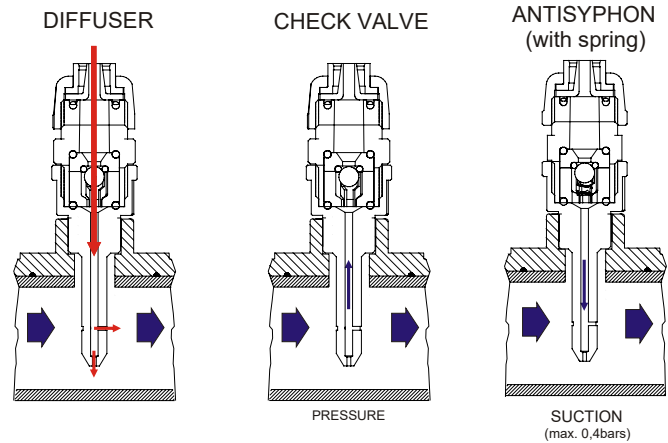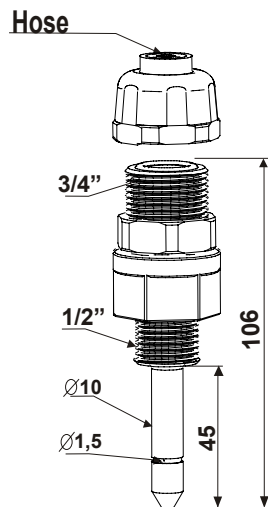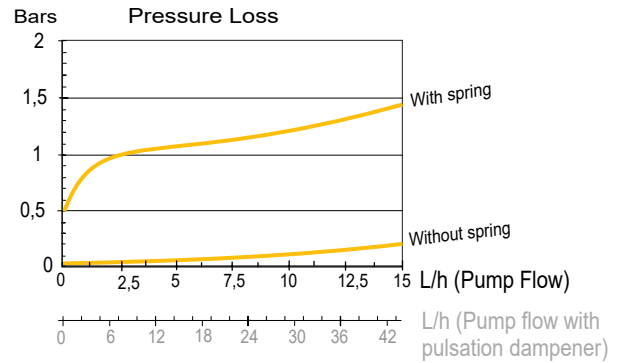





LIST OF PARTS

Polypropylene
18-880-P

PVDF
18-880-F

AISI 316
18-880-I

Polypropylene with spring
18-881-P

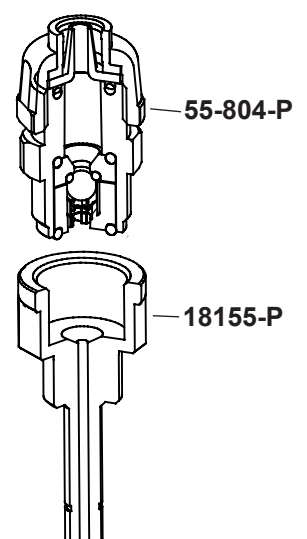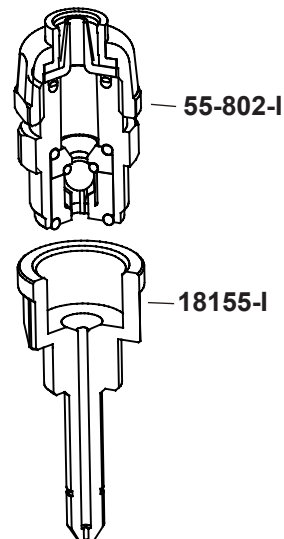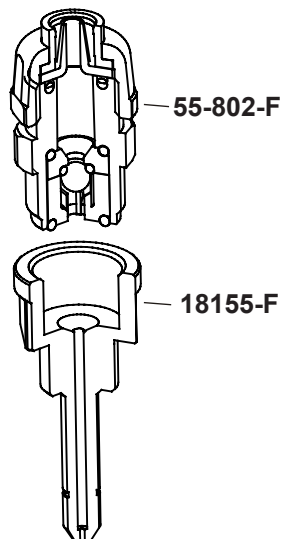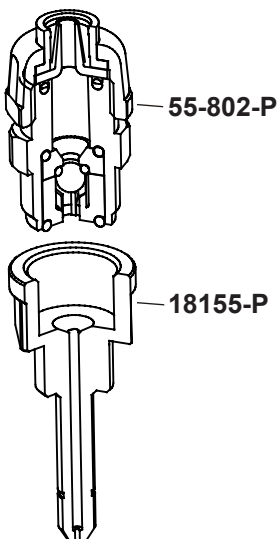

INJECTION VALVE 4-6-10 1/2" 15l/h

ACC056

HOSE CONNECTION

Max. flow		Dostec	10 l/h		60 l/h		120 l/h	120 l/h
		DOSmart	4 l/h	13 l/h		60 l/h	60 l/h	
Hose			4x6	6x8	6x12	10x12	9x12	
 60811.2-P	Flanges	 55826-P	 60878.1-P	 60877.1-P		 60877.1-P		
	Spikes	 55825-P	 55827-P		 55829-P	 55828-P *		
Ref.: 55-824-P								*Optional.

